


| PREFORMED COMPRESSION SEALS |                      |                      |
|-----------------------------|----------------------|----------------------|
| Seal Width                  | Total Allow Movement | Joint Opening @ 60°F |
| 1 3/4"                      | 0.66"                | 1 1/8"               |
| 3"                          | 1.25"                | 1 5/16"              |
| 5"                          | 2.50"                | 3"                   |
| 6"                          | 2.85"                | 3 5/8"               |

Note:  
Seal opening at 60°F based on a temperature variation of 0°F to 120°F.

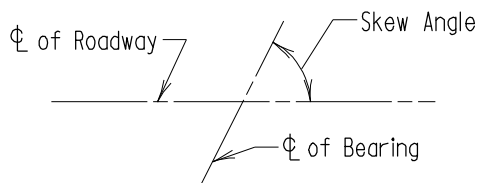

SKIEW ANGLE

Scale: None

FOR OFFICE USE ONLY

| APPROVAL             |          |
|----------------------|----------|
| <i>[Signature]</i>   | DIRECTOR |
| OFFICE OF STRUCTURES |          |
| DATE: 4/12/78        |          |
| REVISIONS            |          |
| SHA                  | FHWA     |
| 10-1-82              | 11-29-85 |
| .                    | .        |
| .                    | .        |

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF STRUCTURES

PREFORMED COMPRESSION SEAL SELECTION CHART

FHWA APPROVAL  
DATE: 10-17-78

STANDARD NO. BR-SS(7.06)-78-71

SHEET 1 OF 1

SUPER - ROADWAY JOINTS